




- Plastic Waterproof Connector/ ETC series
- Type: Back Mount Receptacle
- Gender: Female to Female with FPC wire
- Coupling: Threaded(T)
- Standard: USB3.1,USB3.0,USB2.0
- Shielded: Customization
- Certification: CE RoHS

Mechanical parameter

Shell material:	Thermoplastic plastic PA66, flame retardant grade: V-0
Contact material:	Brass
Cable material:	PVC
Coupling:	Thread (T); Bayonet(B)
Waterproof grade:	IP67 , IP68
Rated voltage	30V
Rated current	1.5A
Insulation resistance:	2000 mΩ
Applicable temperature:	-40℃ ~ +105℃
Durability:	≥2000~10000次(Cycles)

Dimension

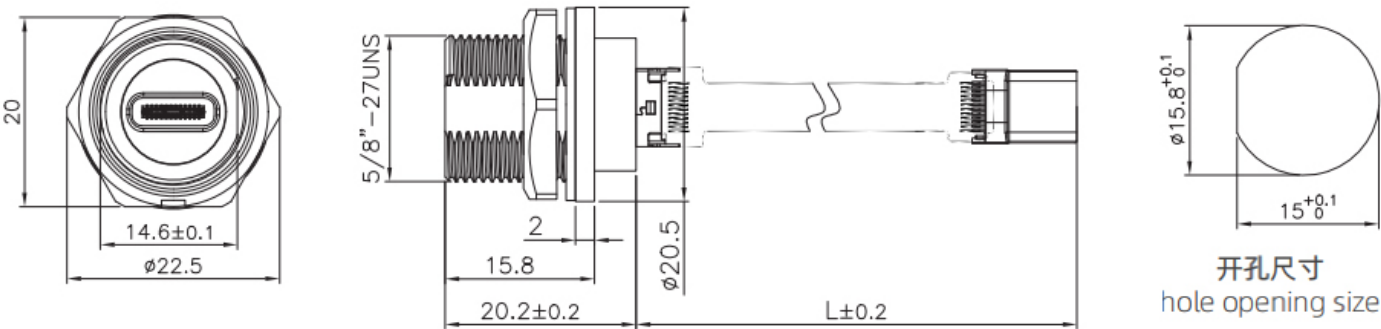

Ordering products

Product Name	Standards	Wire	P/N	3D Download	2D Download
TYPE-C Female/Male FPC Flat cable 3.1 speed(Threaded)-xxM	USB 2.0	FPC	E10T-FT2-PWF/MT2-NWA-xxFPC		
TYPE-C Female/Male FPC Flat cable 3.1 speed(Threaded)-xxM	USB 3.0	FPC	E10T-FT3-PWF/MT3-NWA-xxFPC		
TYPE-C Female/Male FPC Flat cable 3.1 speed(Threaded)-xxM	USB 3.1	FPC	E10T-FT3.1-PWF/MT3.1-NWA-xxFPC		↓
TYPE-C Female/Male FPC Flat cable 3.1 speed(Threaded)-xxM	USB 4.0	FPC	E10T-FT4-PWF/MT4-NWA-xxFPC		

*If need to order other collocation or wire, please consult customer service

Data Download

Product Catalog	CAZN-Plastic Waterproof Connector brochures
EMC	EMC Report 、 EMCReport 、 REACH233Report
RoHS	Certificate 、 Report
Waterproof test report	Certificate 、 Report