




- Combination with hinged frame and other modules possible.
- Number Of Contacts : 3
- Accessories : Hexagonal driver SW-2x40


Dimensions

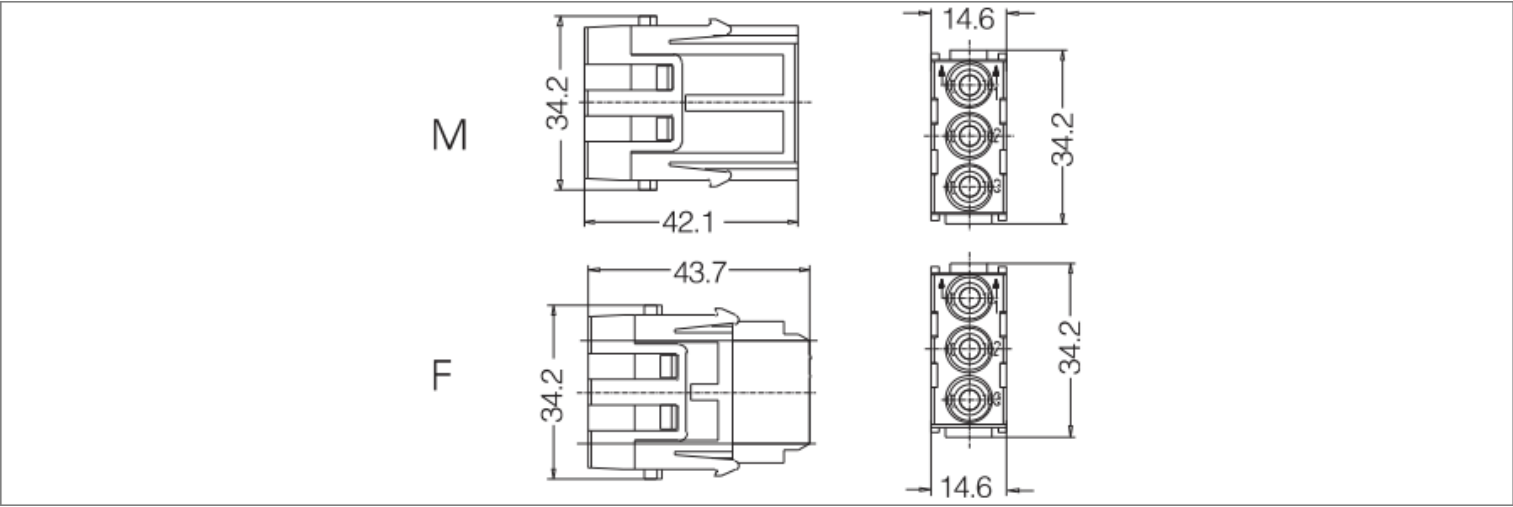

Current carrying capacity

The current carrying is limited by maximum temperature of materials for inserts and contacts including terminals.

Measuring and testing techniques according to DIN EN 60512-5.

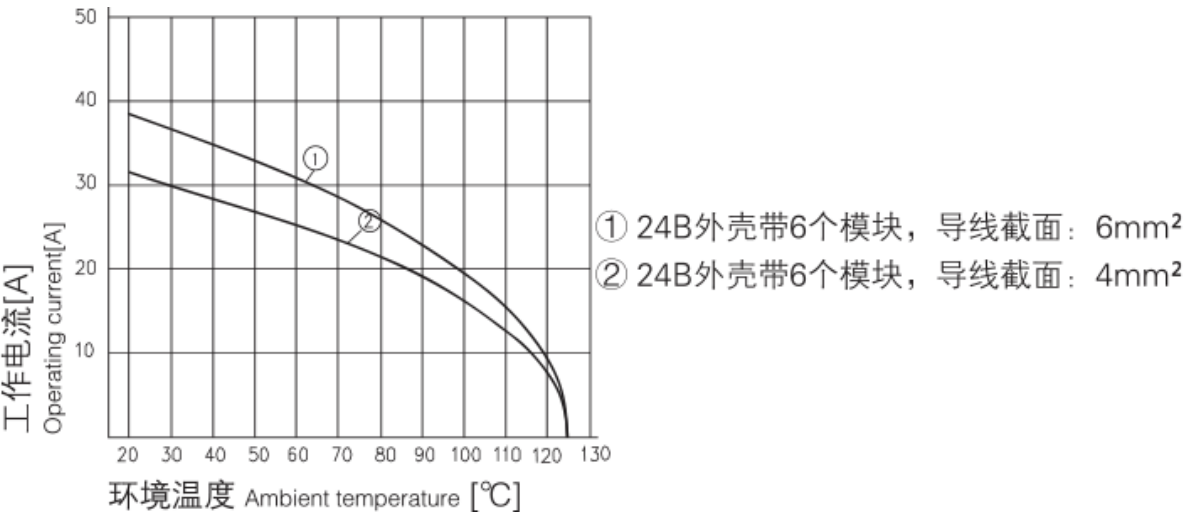

Ordering products

TYPE	NAME	Rated voltage	Rated current	Contacts number	3D upload	2D upload
HMK-003.1-M(2.5-8mm ²)	HMK-003 Axial Module Axial Screw Terminal 3pins Male	690V	40A	3		

HMK-003.2-M(6-10mm²)	HMK-003 Axial Module Axial Screw Terminal 3pins Male	690V	40A	3	☐	☐
HMK-003.1-F(2.5-8mm²)	HMK-003 Axial Module Axial Screw Terminal 3pins Female	690V	40A	3	☐	☐
HMK-003.2-F(6-10mm²)	HMK-003 Axial Module Axial Screw Terminal 3pins Female	690V	40A	3	☐	☐

Data Download

PRODUCT DIRECTORY	CAZN正成-重载连接器选型手册
CERTIFICATION	EMC认证
ROHS REPORT	查看
WATERPROOF TEST REPORT	查看