


- Key (G) or keys (A...M and R), cable collet



TECHNICAL PARAMETER

Durability :	>5000 Cycles
Humidity :	Up to 95% at 60°C/140°F
Operating temperature :	-55°C ~ +200°C
Anti-vibration performance :	10-2000 Hz,15g
Impact resistance :	100g,6ms
Salt spray corrosion test :	>1000 h
Protection level :	IP50
Environment test :	55/175/21
Shielding performance :	>95dB (10MHz); >80dB (1GHz)

DIMENSION

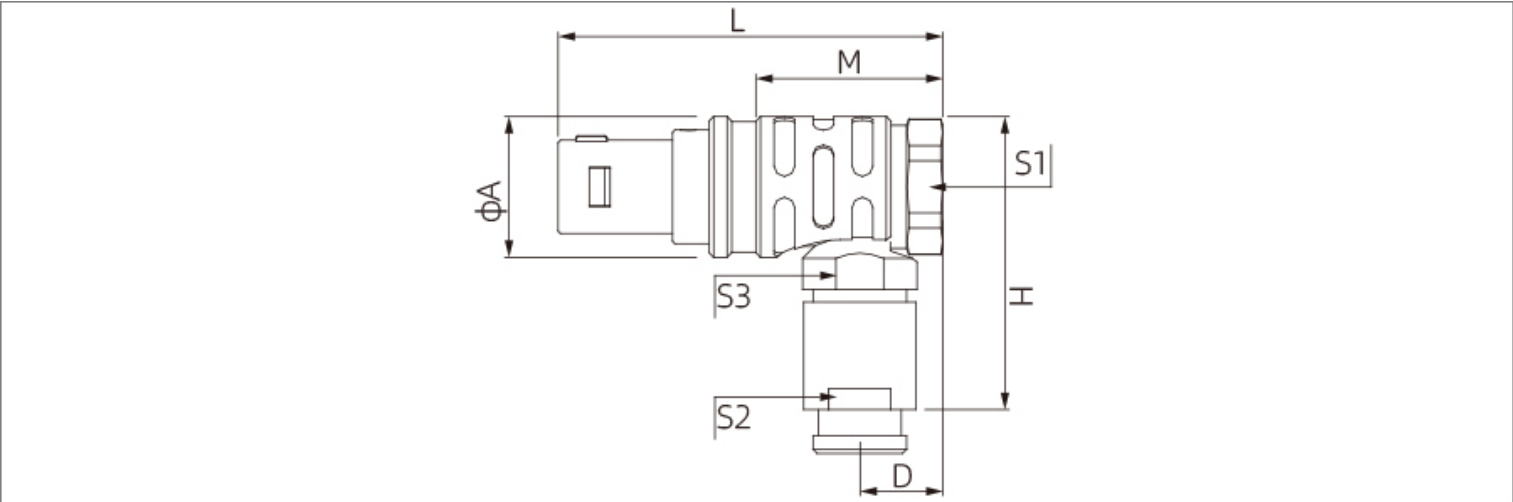

编号(Model)		尺寸(Size)								适配电缆夹 (Adapted collet)	
型号(Type)	系列(Series)	A	D	H	L	M	S1	S2	S3	最小(Min.)	最大(Max.)
THG	00	7.7	5.2	18.0	24.5	16.5	7.0	5.0	5.5	2.2	3.2
THG	0B	11.0	6.5	26.0	31.6	21.6	10.0	7.0	8.0	3.2	5.2
THG	1B	13.5	8.0	30.5	36.0	25.0	11.0	9.0	10.0	4.2	7.2
THG	2B	16.5	9.0	34.0	41.5	29.5	14.0	12.0	13.0	5.2	10.2
THG	3B	19.0	10.0	37.0	50.0	35.0	17.0	14.0	15.0	5.2	14.2

Ordering products

插头:

TH

G

1B

306

C

L

A

D

52

Z

定位销	系列编号	针芯配置
G A B C	00	302 303 304 305 306
D E F J	0B	302 303 304 305 306 307 309 312
K L M Y	1B	302 303 304 305 306 307 308 310 314 316
	2B	302 303 304 305 306 307 308 310 312 314 316 318 319 326 332 514
	3B	302 303 304 305 306 307 308 309 310 312 314 316 318 320 322 324 326 330 332

针芯

A:针型

L:孔型

电缆直径φ

00:2.2~3.2

0B:3.2~5.2

1B:4.2~7.2

2B:5.2~10.2

3B:5.2~14.2

注:详细说明请参考本司画册或联系客服咨询。

Data Download

Product Catalog	CAZN-Push Pull Series Brochure
-----------------	--