


- Key (G) or keys (A...M and R), and protruding shell




TECHNICAL PARAMETER

Durability :	>5000 Cycles
Humidity :	Up to 95% at 60°C/140°F
Operating temperature :	-55°C ~ +200°C
Anti-vibration performance :	10-2000 Hz,15g
Impact resistance :	100g,6ms
Salt spray corrosion test :	>1000 h
Protection level :	IP50
Environment test :	55/175/21
Shielding performance :	>95dB (10MHz); >80dB (1GHz)

DIMENSION

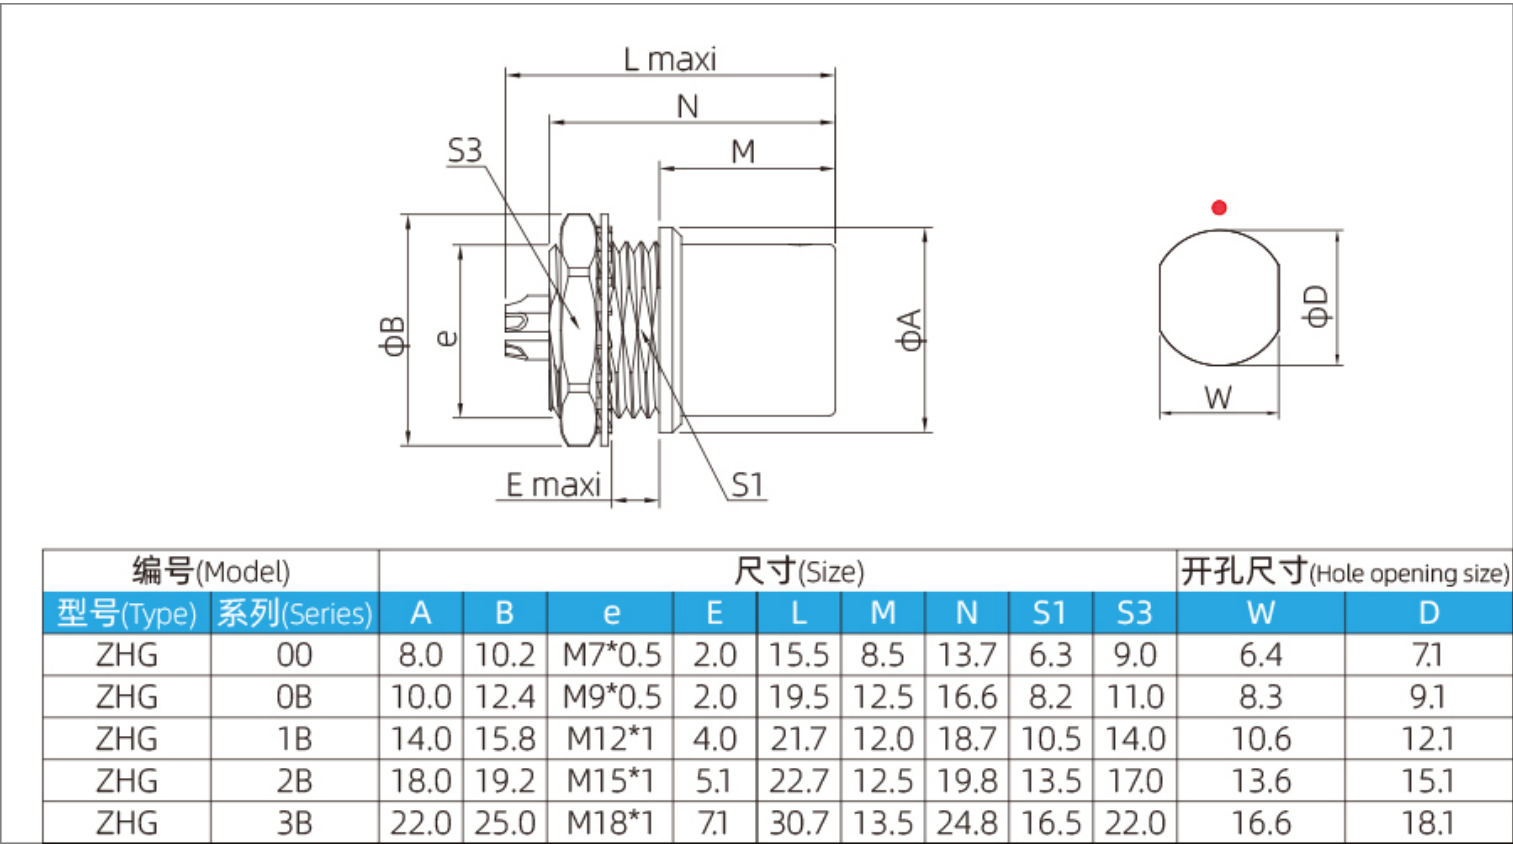

Ordering products

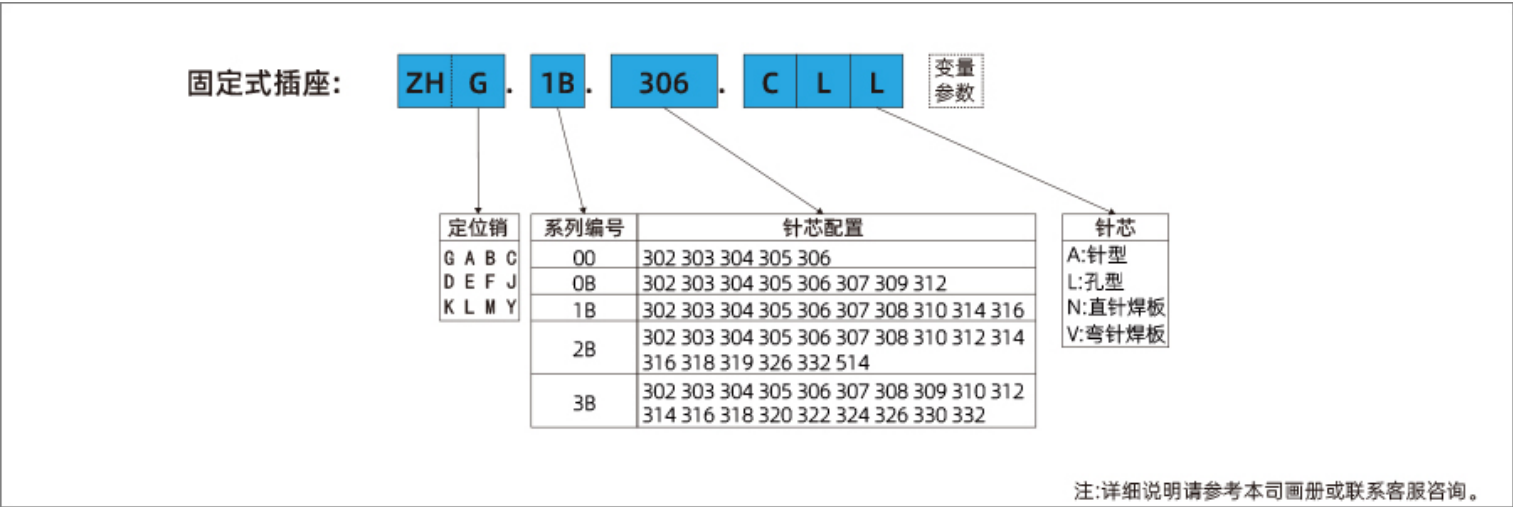

Data Download

Product Catalog	CAZN-Push Pull Series Brochure
-----------------	--