


- Nut fixing, key (G) or keys (A to F and L), watertight or vacuumtight



TECHNICAL PARAMETER

Durability :	>5000 Cycles
Humidity :	Up to 95% at 60°C/140°F
Operating temperature :	-45°C ~ +125°C
Anti-vibration performance :	10-20000 Hz,15g
Impact resistance :	100g,6ms
Salt spray corrosion test :	>96 h
Protection level :	IP68

DIMENSION

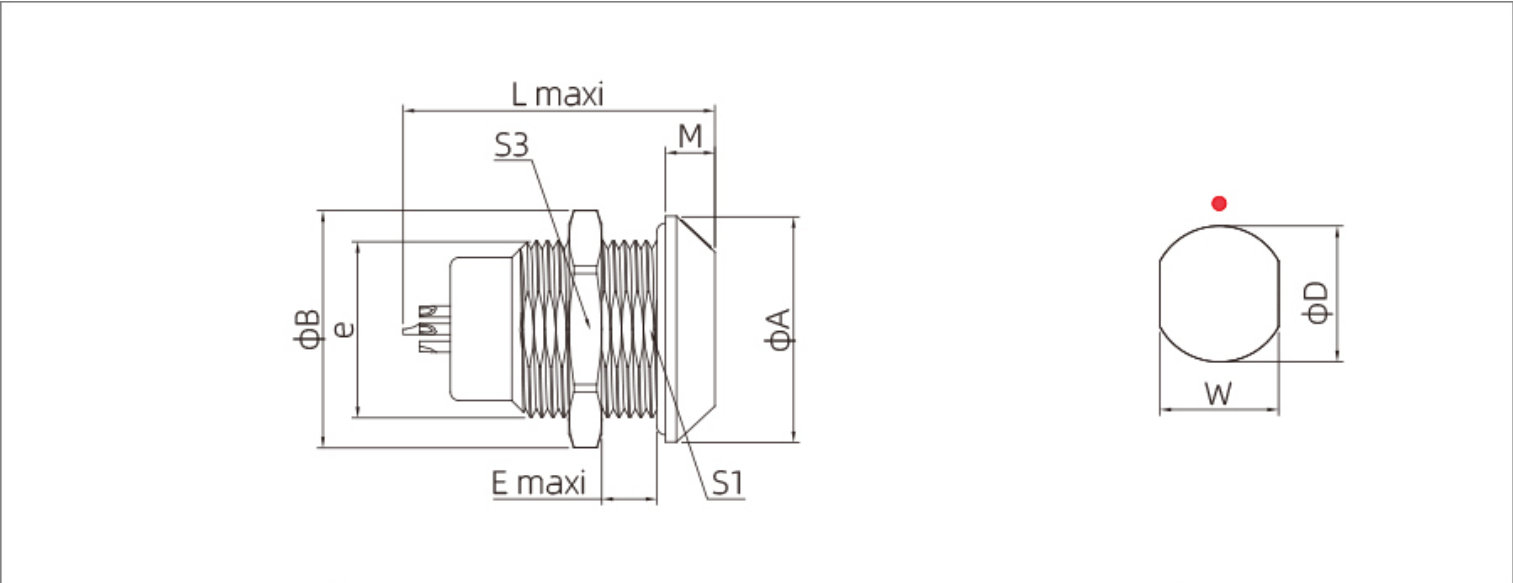

编号(Model)		尺寸(Size)								开孔尺寸(hole opening size)	
型号(Type)	系列(Series)	A	B	e	E	L	M	S1	S3	W	D
MGG	0K	18.0	19.2	M14*1	5.5	23.0	4.0	12.5	17.0	12.6	14.1
MGG	1K	20.0	21.5	M16*1	9.0	30.0	4.5	14.5	19.0	14.6	16.1
MGG	2K	25.0	27.0	M20*1	13.0	33.7	5.0	18.5	24.0	18.6	20.1
MGG	3K	31.0	34.0	M25*1	16.0	41.7	6.0	22.5	30.0	22.6	25.1

Ordering products

固定式插座:

MG

G

2K

310

C

L

L

变量参数

定位销
 G A B C
 D E F J

系列编号	针芯配置
0K	302 303 304 305 306 307 309 312
1K	302 303 304 305 306 307 308 310 314 316
2K	302 303 304 305 306 307 308 310 312 314 316 318 319 326 332 514
3K	302 303 304 305 306 307 308 309 310 312 314 316 318 320 322 324 326 330 332

针芯
 A:针型
 L:孔型
 N:直针焊板
 V:弯针焊板

Data Download

Product Catalog	CAZN-Push Pull Series Brochure
-----------------	--