


- Key (1,2,3) , cable collet



TECHNICAL PARAMETER

Coupling:	Push-pull self-locking
Operating temperature:	-45℃ ~ +125℃
Maximum humidity:	Up to 95% at 60℃/140°F
Shielding performance:	>95dB(10MHz) ; >80dB(1GHz)
Anti-vibration performance:	15g[10~20000Hz]
Salt spray test:	> 96h
Impact resistance:	100g,6ms
Mechanical life:	> 5000 cycles
Protection level:	IP68

DIMENSION

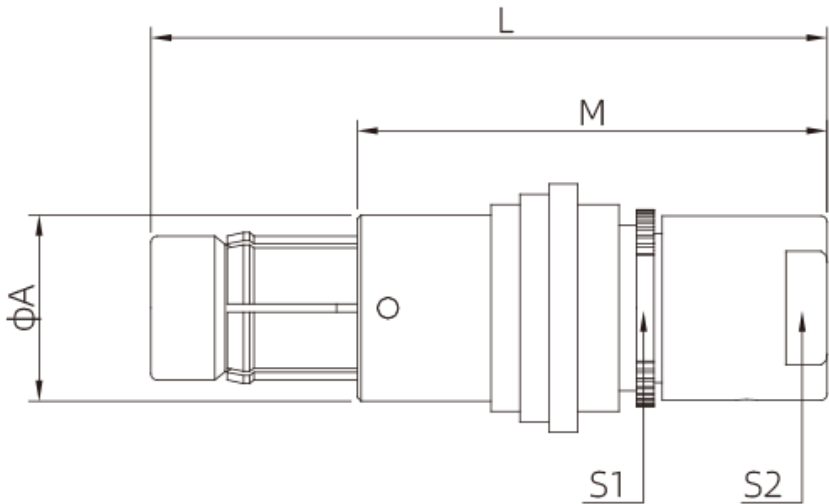

编号(Model)		尺寸(Size)					适配电缆夹(Adapted collet)	
型号(Type)	系列(Series)	A	L	M	S1	S2	最小(Min.)	最大(Max.)
TD1	0F	9.0	33.0	23.0	8.0	7.0	3.2	5.0
TD1	1F	12.0	37.0	26.0	11.0	9.0	4.2	7.0
TD1	AF	12.3	40.0	30.0	11.0	11.0	5.2	8.0
TD1	2F	15.0	43.0	31.0	13.0	12.0	5.2	10.0

Ordering products

插头:

TD	1	1F	304	C	L	A	C	52	变量参数
定位销 1 2 3		系列编号	针芯配置					针芯 A:针型 L:孔型	电缆直径φ
		0F	302 303 304 305 307 309 310						0F:3.2~5.0
		1F	302 303 304 305 306 307 308 310 312 316						1F:4.2~7.0
		AF	310 312 314 315 319						AF:5.2~8.0
		2F	302 303 304 306 308 316 319						2F:5.2~10.0

Data Download

Product Catalog	CAZN-Push Pull Series Brochure
-----------------	--