


- Key (1,2,3) , cable collet



TECHNICAL PARAMETER

Coupling:	Push-pull self-locking
Operating temperature:	-45℃ ~ +125℃
Maximum humidity:	Up to 95% at 60℃/140°F
Shielding performance:	>95dB(10MHz) ; >80dB(1GHz)
Anti-vibration performance:	15g[10~20000Hz]
Salt spray test:	> 96h
Impact resistance:	100g,6ms
Mechanical life:	> 5000 cycles
Protection level:	IP68

DIMENSION

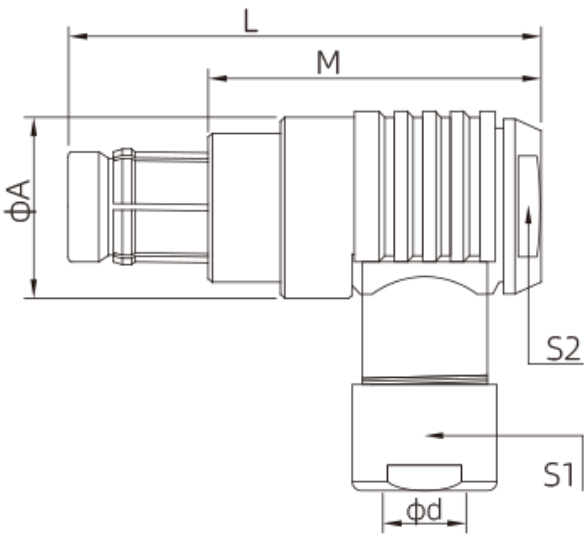

编号(Model)		尺寸(Size)						适配电缆夹(Adapted collet)	
型号(Type)	系列(Series)	A	L	M	H	S1	S2	最小(Min.)	最大(Max.)
TW1	0F	12.0	33.0	23.0	25.0	7.0	8.0	3.2	5.0
TW1	1F	15.0	38.0	28.7	31.0	10.0	11.0	4.2	7.0
TW1	AF	17.0	40.0	30.0	33.0	12.0	12.0	5.2	8.0
TW1	2F	19.0	45.0	33.0	37.0	13.0	14.0	5.2	10.0

Ordering products

插头:

TW

1

.

1F

.

316

.

C

L

A

C

.

52

变量参数

定位销

1 2 3

系列编号

针芯配置

针芯

A:针型

L:孔型

电缆直径φ

0F:3.2~5.0

1F:4.2~7.0

AF:5.2~8.0

2F:5.2~10.0

系列编号	针芯配置
0F	302 303 304 305 307 309 310
1F	302 303 304 305 306 307 308 310 312 316
AF	310 312 314 315 319
2F	302 303 304 306 308 316 319

Data Download

Product Catalog	CAZN-Push Pull Series Brochure
-----------------	--