




TECHNICAL PARAMETER

|                             |                         |
|-----------------------------|-------------------------|
| Durability:                 | >5000 Cycles            |
| Humidity:                   | Up to 95% at 60°C/140°F |
| Operating temperature:      | -55°C ~ +200°C          |
| Anti-vibration performance: | 10-2000 Hz,15g          |
| Impact resistance:          | 100g,6ms                |
| Salt spray corrosion test:  | >1000 h                 |
| Protection level:           | IP50                    |

DIMENSION

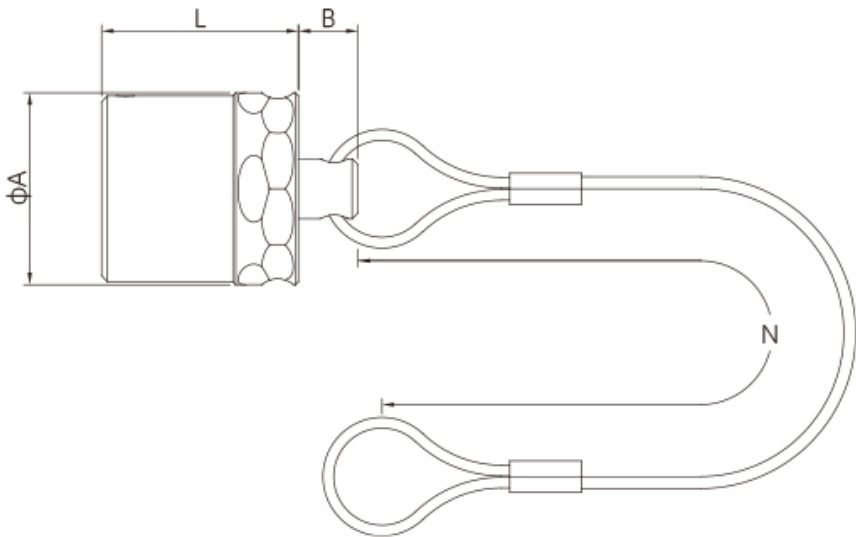

| 编号(Model)       |            | 尺寸(Dimensions)(mm) |      |   |     |
|-----------------|------------|--------------------|------|---|-----|
| 型号(Part number) | 系列(Series) | A                  | L    | B | N   |
| BFG.0K.100.NAS  | 0K         | 14                 | 12.5 | 6 | 85  |
| BFG.1K.100.NAS  | 1K         | 16                 | 15.5 | 6 | 85  |
| BFG.2K.100.NAS  | 2K         | 19.5               | 17.5 | 6 | 85  |
| BFG.3K.100.NAS  | 3K         | 23                 | 22   | 6 | 120 |

Ordering products

| Product Description   | Series | Part Number    | 3D Download       | 2D Download       |
|-----------------------|--------|----------------|-------------------|-------------------|
| K Series-Plug Caps 0K | 0K     | BFG.0K.100.NAS | <a href="#">↓</a> | <a href="#">↓</a> |
| K Series-Plug Caps 1K | 1K     | BFG.1K.100.NAS | <a href="#">↓</a> | <a href="#">↓</a> |
| K Series-Plug Caps 2K | 2K     | BFG.2K.100.NAS | <a href="#">↓</a> | <a href="#">↓</a> |
| K Series-Plug Caps 3K | 3K     | BFG.3K.100.NAS | <a href="#">↓</a> | <a href="#">↓</a> |

Data Download

|                 |                                                |
|-----------------|------------------------------------------------|
| Product Catalog | <a href="#">CAZN-Push Pull Series Brochure</a> |
|-----------------|------------------------------------------------|