




技术参数

外壳材料：	黄铜镀镍
芯套材料：	尼龙PA66
防护等级：	IP68(要使用O型圈的情况下)

尺寸图

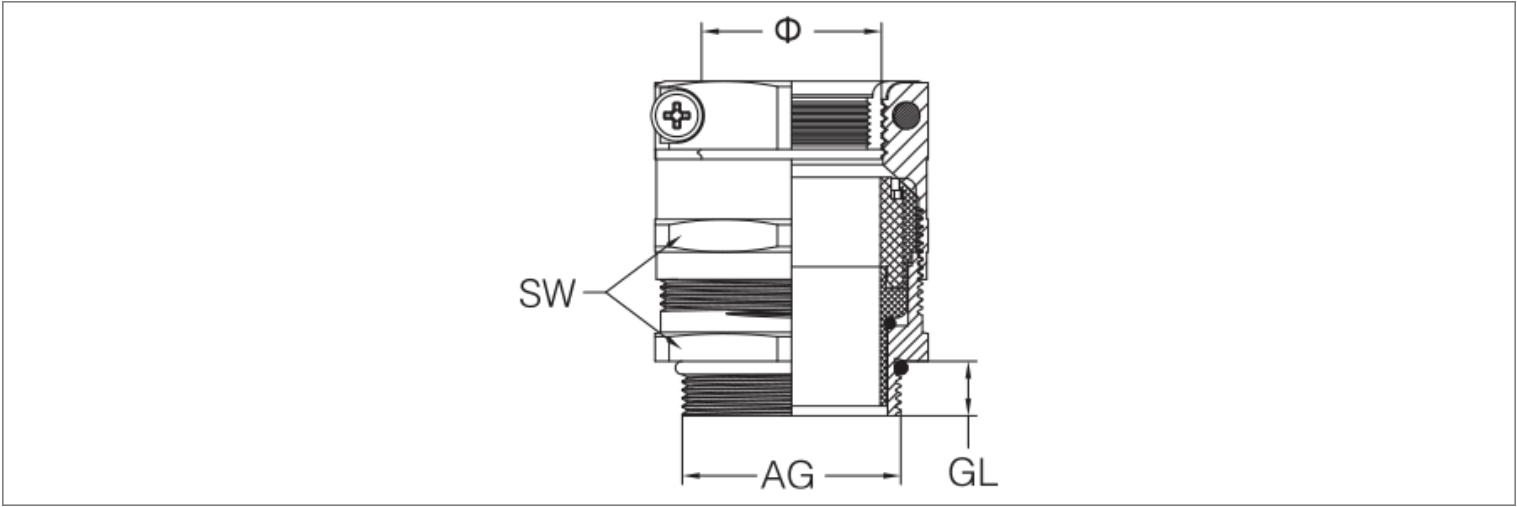

订购产品

螺纹尺寸	卡口范围(φ)	螺纹外径(AG)	扳手尺寸(SW)	螺纹长度(GL)	型号	3D下载	2D下载
PG制螺纹							
PG9	4-8	15.2	17	7	CKS-PG9(4-8)	↓	↓
PG11	5-10	18.6	22	7	CKS-PG11(5-10)	↓	↓
PG13.5	6-12	20.4	22	8	CKS-PG13.5(6-12)	↓	↓
PG16	10-14	22.5	24	7.5	CKS-PG16(10-14)	↓	↓
PG21	13-18	28.3	30	8	CKS-PG21(13-18)	↓	↓
PG29	18-25	37.0	40	9	CKS-PG29(18-25)	↓	↓
PG36	22-32	47.0	50	12	CKS-PG36(22-32)	↓	↓
PG42	30-38	54.0	57	12	CKS-PG42(30-38)	↓	↓
M 公制螺纹							
PG16x1.5	4-8	16	18	6.5	CKS-M16(4-8)	↓	↓
PG16x1.5	5-10	16	22	6	CKS-M16(5-10)	↓	↓
PG20x1.5	6-12	20	22	7.5	CKS-M20(6-12)	↓	↓
PG25x1.5	10-16	25	27	8	CKS-M25(10-16)	↓	↓
PG25x1.5	13-18	25	30	7.5	CKS-M25(13-18)	↓	↓
PG32x1.5	16-22	32	35	8.5	CKS-M32(16-22)	↓	↓

PG32x1.5	18-25	32	40	8	CKS-M32(18-25)	↓	↓
PG40x1.5	22-30	40	45	12	CKS-M40(22-30)	↓	↓
PG40x1.5	22-32	40	50	12	CKS-M40(22-32)	↓	↓
PG50x1.5	30-38	50	57	12	CKS-M50(30-38)	↓	↓

单位:mm

资料下载

产品目录	CAZN正成-重载连接器选型手册
认证/证书	EMC认证
RoHS报告	查看
防水测试报告	查看