


PART NO.	Current Rating	Dimension
		ø A
1198-133-815-000	40 AMPS	ø3.75
1198-133-615-000	30 AMPS	ø3.3
1198-133-415-000	20 AMPS	ø2.8
1198-133-215-000	10 AMPS	ø1.7

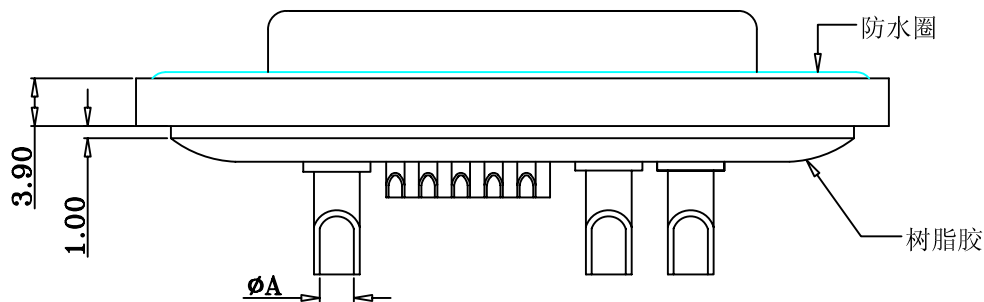

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
 CONNECTOR INSULATOR : PBT THERMOPLASTIC,
 30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
 SIGNAL CONTACT MATERIAL: BRASS, FULL GOLD FLASH
 HIGH POWER CONTACT MATERIAL: BRASS, 15u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING :10,20,OR 40 AMPS
 HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE :
 1000 V AC FOR 1 MINUTE
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +125°C



Drawn by	liuqiong	2002.05.10
Designed by	liuqiong	2002.05.10
Approved by	yangjinguo	2002.05.10
	Sheet 1 of 1	Code 000
Dimensions in mm(inches)		Scale 1:1
Tolerances on:XX+/-0.13		Angles+/-2°

G\Ybn\Yb: 7\Unb`9` YWlf cbj W7c" z` @hX`	
D-SUB CONNECTOR (Power Contact & Coaxial Contact Solder Type)	
Ver A0	Part No: 1198-133-X15-003