




A 编码




2Pin




3Pin




4Pin




5Pin




6Pin




7Pin



8Pin




10Pin




12Pin


B 编码



2Pin B




3Pin B




4Pin B


C 编码



2Pin C



3Pin C





4Pin C

芯数	2P	3P	4P	5P	6P	7P	8P	10P	12P	2P B	3P B	4P B	2P C	3P C	4P C
额定电压	60V	60V	60V	60V	60V	60V	60V	30V	30V	300V	300V	300V	125V	125V	125V
额定电流	5A	5A	5A	5A	5A	5A	5A	2A	2A	10A	10A	10A	10A	10A	10A
防水等级	IP67/IP68														
使用温度	-45°C~105°C														

E系列 插针:

- 2~12P: E系列 1.0焊线式公针长针
- 2~4P B: E系列 1.6焊线式公针长针
- 2~4P C: E系列 1.6焊线式公针长针

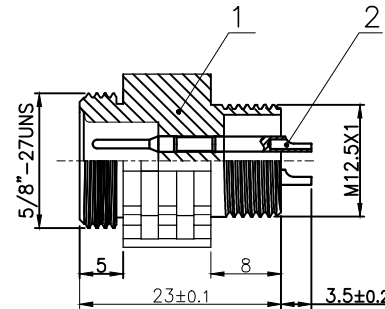

技术参数

连接方式: 螺纹连接
接线方式: 焊线
污染等级: 3
插拔周期: ≥500


所有材料均符合RoHS要求

材料

外壳材料: 增强尼龙, 黑色
接触体材料: 黄铜, 镀金
绝缘体材料: 增强尼龙, 黑色
密封材料: 橡胶, 黑色

GENERAL TOLERANCE (UNLESS SPECIFIED)

≤10 ±0.1
<10~≤20 ±0.2
<20~≤50 ±0.5
Angle ±1°



THIRD ANGLE

DWN

L.L

DATE

2022.8.15

CHK

DATE

APVD

DATE

UNIT

MM

REV

A

SIZE

A4

SHEET

1 OF 1

CAZN 正成

TITLE

E10 螺纹式针型对接插头半成品

PART NO

DRAWING NO

E10P-TK-Px

2	E系列 焊线式公针长针	黄铜	镀金	pc	2~12
1	E10 螺纹式针型对接插头外壳	尼龙	/	pc	1
No.	Specification	Material	Treat	Unit	Q'ty