




A 编码




2Pin




3Pin




4Pin




5Pin




6Pin




7Pin



8Pin




10Pin




12Pin


B 编码



2Pin B




3Pin B




4Pin B


C 编码



2Pin C



3Pin C



4Pin C

芯数

2P

3P

4P

5P

6P

7P

8P

10P

12P

2P B

3P B

4P B

2P C

3P C

4P C

额定电压

60V

60V

60V

60V

60V

60V

60V

30V

30V

300V

300V

300V

125V

125V

125V

额定电流

5A

5A

5A

5A

5A

5A

5A

2A

2A

10A

10A

10A

10A

10A


10A

防水等级


IP67/IP68

使用温度

-45°C~105°C



ø19.0

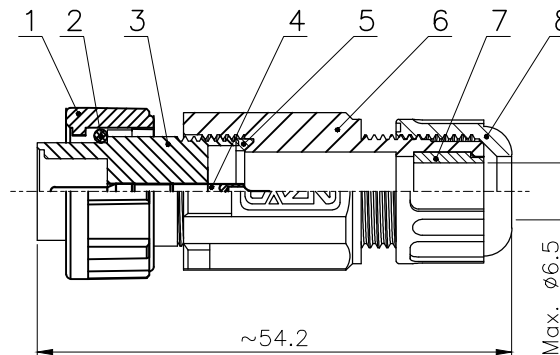

~54.2

Max. ø6.5

E系列 插针:

2~12P: E系列 1.0焊线式公针长针

2~4P B: E系列 1.6焊线式公针长针

2~4P C: E系列 1.6焊线式公针长针

8	E10 紧锁螺帽	尼龙	/	pc	1
7	E10 组装式防水硅胶塞	硅胶	/	pc	1
6	E10 插头主体	尼龙	/	pc	1
5	防水O型圈 φ13Xφ10X1.5	橡胶	/	pc	1
4	E系列 焊线式公针长针	黄铜	镀金	pc	1
3	E10 针型插头外壳	尼龙	/	pc	1
2	E10 插头胶芯O型防水圈 φ12×φ9×1.5	橡胶	/	pc	2~12
1	E10 卡扣式连接螺帽	尼龙	/	pc	1
No.	Specification	Material	Treat	Unit	Q'ty


GENERAL TOLERANCE
(UNLESS SPECIFIED)

≤10 ±0.1

<10~≤20 ±0.2

<20~≤50 ±0.5

Angle ±1°



THIRD ANGLE

DWN

DATE

L.L

2022.8.15

CHK

DATE

APVD

DATE

UNIT

REV

MM

A

SIZE

SHEET

A4

1 OF 1

TITLE

E10 卡扣式针型组装式插头

PART NO

DRAWING NO

E10P-BA1-Px