




A 编码




2Pin




3Pin




4Pin




5Pin




6Pin




7Pin



8Pin




10Pin




12Pin


B 编码



2Pin B




3Pin B




4Pin B


C 编码



2Pin C



3Pin C



4Pin C

芯数

2P

3P

4P

5P

6P

7P

8P

10P

12P

2P B

3P B

4P B

2P C

3P C

4P C

额定电压

60V

60V

60V

60V

60V

60V

60V

30V

30V

300V

300V

300V

125V

125V

125V

额定电流

5A

5A

5A

5A

5A

5A

5A

2A

2A

10A

10A

10A

10A

10A



10A

防水等级

IP67/IP68

使用温度

-45°C~105°C

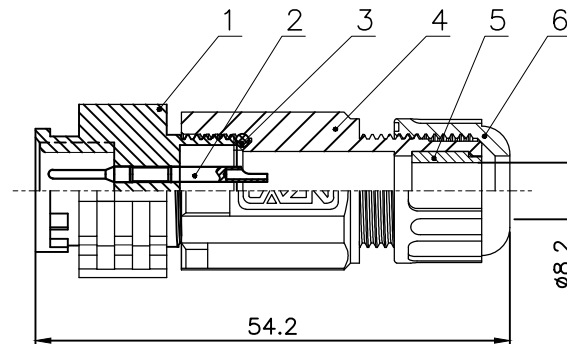
 $\varnothing 19.8$


54.2

 $\varnothing 8.2$


E系列 插针:

2~12P: E系列 1.0焊线式公针长针

2~4P B: E系列 1.6焊线式公针长针

2~4P C: E系列 1.6焊线式公针长针

No.	Specification	Material	Treat	Unit	Q'ty
6	E10 紧锁螺帽	尼龙	/	pc	1
5	E10 组装式防水硅胶塞	硅胶	/	pc	1
4	E10 插头主体	尼龙	/	pc	1
3	防水O型圈 $\varnothing 13 \times \varnothing 10 \times 1.5$	橡胶	/	pc	1
2	E系列 焊线式公针长针	黄铜	镀金	pc	2~12
1	E10 卡扣式针型对接插头外壳	尼龙	/	pc	1

GENERAL TOLERANCE
(UNLESS SPECIFIED)
 $\leq 10 \pm 0.1$
 $< 10 \sim \leq 20 \pm 0.2$
 $< 20 \sim \leq 50 \pm 0.5$
Angle $\pm 1^\circ$ 

THIRD ANGLE

DWN

CHK

APVD

UNIT

MM

SIZE

A4

REV

A

SHEET

1 OF 1

TITLE

E10 卡扣式针型组装式对接插头

PART NO

DRAWING NO

E10P-BK1-Px