


BOARD END HOLE
OPENING SIZE

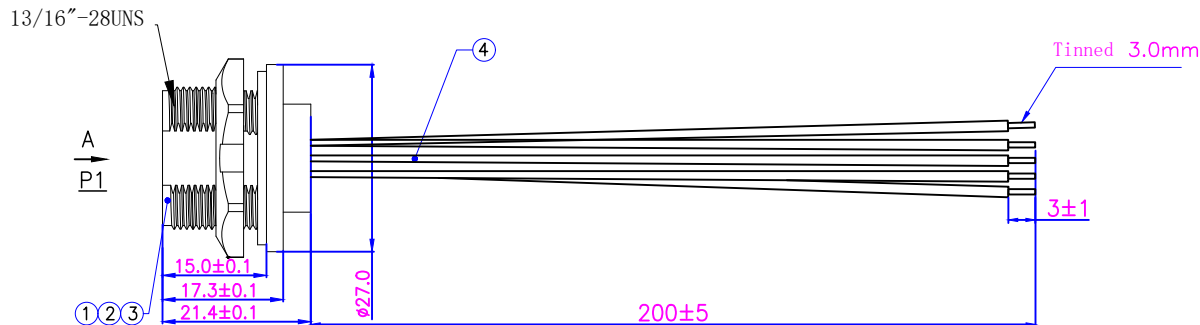

Matters needing attention in production

Connector General Specifications	
Wire specifications	
Contact quantity	4
Temperature range	-25℃~+80℃
Flame retardant grade	UL94-V0
Degree of protection	IP67
Withstand voltage	≥AC1000V/1min
Rated current	1A
Contact resistance	≤30 mΩ
Insulation resistance	≥100MΩ DC500V

Wire Diagram		
P1	Wire Color	Open
1	Red	
2	White	
3	Green	
4	Black	
Shell	Brown	


No.	Specification	Unit	Q'ty
5	UL1007 24AWG (11/0.16TS) OD:1.4 Electronic wire (See the linear color defined by the wire)	pc	5
4	USB3.0 female head welded wire type 9PIN blue rubber core	pc	1
3	E13 plastic seat waterproof gasket Φ24.8xΦ20.6x1.5	pc	1
2	E13 plastic hexagon nut 13/16-28UNS (28.6-25.4-4 unilateral chamfer)	pc	1
1	USB board rear mounting base plastic shell (With LOGO:CAZN)	pc	1

深圳市正成电气有限公司
受控文件

Statement: Please confirm and return the drawings within 2 working days. If the drawings are not returned after the expiration date, the default is that you have been confirmed to be qualified.

Customer	DWN NO	DATE	DWN	APVD
P/N		2023-10-11	李平	
Product Name		UNIT: mm	Size:A4	

GENERAL TOLERANCE (UNLESS SPECIFIED)		DWN		
≤10	±0.1	CHK		
<10~≤20	±0.2	APVD		
<20~≤50	±0.5			TITLE E13U2-TF2-F-0.2M
Angle	±3'			PART NO
		UNIT MM	REV A1	DRAWING NO 2CA2-E13U2-TF2-F-0.2M
		SIZE A4	SHEET 1 OF 1	



THIRD ANGLE

RoHS