

1

2

3

4

5


6

A

A

B

B

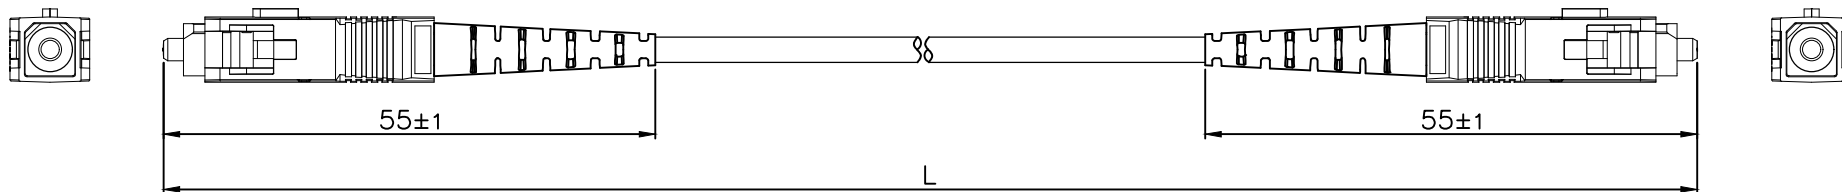

C

C

技术参数		环境条件	
连接方式:	耦合连接	工作温度:	-25°C~80°C
插拔次数:	≥500	储存温度:	-5°C~65°C
防水等级:	IP67	大气压力:	(86~106) kPa
阻燃等级:	UL94-V0	相对湿度:	≤90%
传输速度:	10Gb/s		
重复性:	≤0.1db		
插入损耗:	≤0.2db		
回波损耗:	≤0.1db		
互换性:	≤0.2db		
最大插入损耗:	≤0.3db		
波长:	1200~1600nm		

产品型号	L (mm)
E13FDDI-SC/SC-1M	1000±30
E13FDDI-SC/SC-2M	2000±30
E13FDDI-SC/SC-3M	3000±30

D

D

GENERAL TOLERANCE (UNLESS SPECIFIED) ≤10 ±0.1 <10~≤20 ±0.2 <20~≤50 ±0.5 Angle ±1°	DWN		
	CHK		
	APVD		
 THIRD ANGLE	UNIT MM	REV A	TITLE SC单工插头
	SIZE A4	SHEET 1 OF 1	PART NO DRAWING NO E13FDDI-SC/SC