

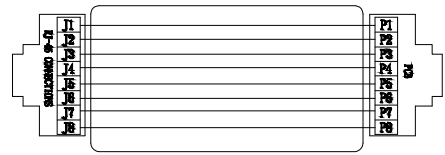


产品开孔尺寸

7	E13 防尘帽防水圈 19.6*1.5 E13 Dust cap waterproof ring 19.6*1.5	硅胶 silica gel	黑色 Black	pc	1
6	E13 螺牙防尘盖 E13 Screw dust cover	塑胶 Plastic	黑色 Black	pc	1
5	E10 防尘帽插条 E10 Dust cap insert	PE	黑色 Black	pc	1
4	E13 板前板后防水圈 24.8*1.5 E13 Waterproof ring 24.8*1.5	硅胶 Silica gel	黑色 Black	pc	1
3	E13 法兰螺母 E13 flange nut	PA66	黑色 Black	pc	1
2	RJ45板后主体 RJ45 back mounting body	PA66	黑色 Black	pc	1
1	RJ45 卧式网口转网线带扎位: TRC-97C RJ45 single network port TRC-97C	RJ网口+PCB板 RJ network port +PCB board	镀金 gold plated	pc	1
No.	Specification	Material	Treat	Unit	Q'ty

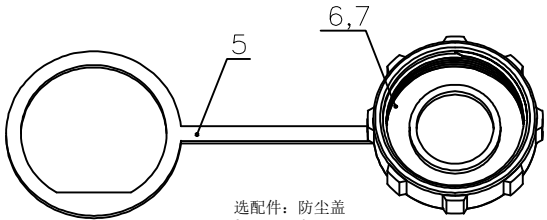

接线定义



选配件: 防尘盖
Option: dust cover

技术参数(Technical specifications):

传输速率: transmission rate	符合TIA或EIA 568B的5E类/6A类D级/等级和符合ISO/IEC 11801 CAT5E/6A ,According to TIA or EIA 568B,According to ISO/IEC 11801
防水等级: Degree of protection	IP67
接触电阻: Contact resistance	≦20m Ω
绝缘电阻: Insulation resistance	≧500M Ω at DC500V
工频耐电压: Withstand voltage	≧AC 1000V / 1 分钟 ≧AC 1000V / 1 minute
盐雾腐蚀: Salt spray corrosion	48小时 48 hours
POE:	60W / 2A

GENERAL TOLERANCE (UNLESS SPECIFIED) ≤10 ±0.1 <10~≤20 ±0.2 <20~≤50 ±0.5 Angle ±1'	DWN		
	CHK		
APVD	TITLE RJ45-F-S		
 THIRD ANGLE	UNIT MM	REV A	PART NO
	SIZE A4	SHEET 1 OF 1	DRAWING NO