


芯位排布

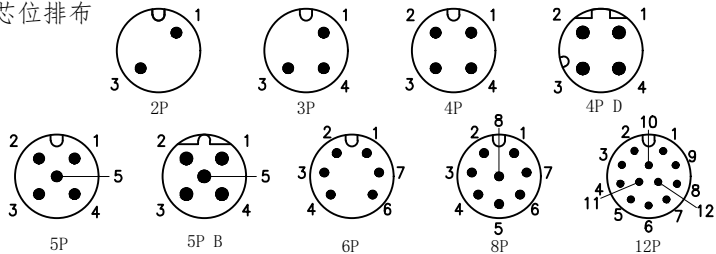

芯数

额定电流/电压

额定脉冲电压

绝缘电阻 (MΩ)

接触电阻 (mΩ)

2

4A/250V

4A/250V

≥ 100

≤ 5

3

4A/250V

4A/250V

≥ 100

≤ 5

4

4A/250V

4A/250V

≥ 100

≤ 5

4D

4A/250V

4A/250V

≥ 100

≤ 5

5

4A/60V

4A/60V

≥ 100

≤ 5

5B

4A/60V

4A/60V

≥ 100

≤ 5

6

2A/30V

2A/30V

≥ 100

≤ 5



8

2A/30V

2A/30V

≥ 100

≤ 5

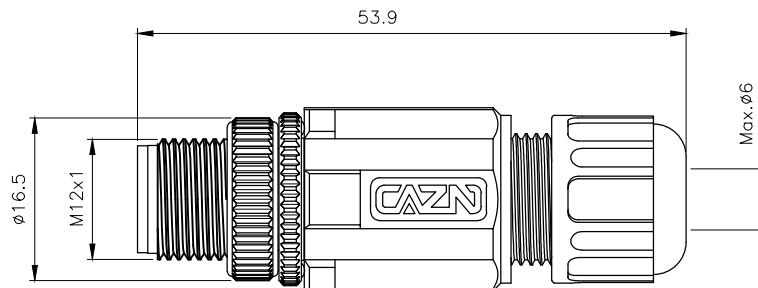

## 技术参数

连接方式: 螺纹连接

外壳材料: 尼龙, 镀镍

接线方式: 焊线

接触体材料: 黄铜, 镀金

污染等级: 3

绝缘体材料: 增强尼龙, 黑色

温度范围: -40°C ~ +80°C


密封材料: 橡胶, 黑色

防护等级: IP67

插拔周期: ≥500

GENERAL TOLERANCE  
(UNLESS SPECIFIED)

≤10 ±0.1  
 <10~≤20 ±0.2  
 <20~≤50 ±0.5  
 Angle ±1°



THIRD ANGLE

DWN

DATE

W.M

2022.8.23

CHK

DATE

APVD

DATE

UNIT

REV

MM

A

SIZE

SHEET

A4

1 OF 1

CAZN 正成

TITLE

M12 塑料针型组装式插头

PART NO

DRAWING NO

M12P-A-Px