

芯位排布



2P



3P



4P



4P D



5P



5P B



6P



8P



12P

芯数

2

3

4

4D

5

5B

6

8

额定电流/电压

4A/250V

4A/250V

4A/250V

4A/250V

4A/60V

4A/60V

2A/30V

2A/30V

额定脉冲电压

4A/250V

4A/250V

4A/250V

4A/250V

4A/60V

4A/60V

2A/30V

2A/30V

绝缘电阻 (MΩ)

≥ 100

≥ 100

≥ 100

≥ 100

≥ 100

≥ 100

≥ 100

≥ 100

接触电阻 (mΩ)

≤ 5

≤ 5

≤ 5



≤ 5

≤ 5

≤ 5

≤ 5

≤ 5

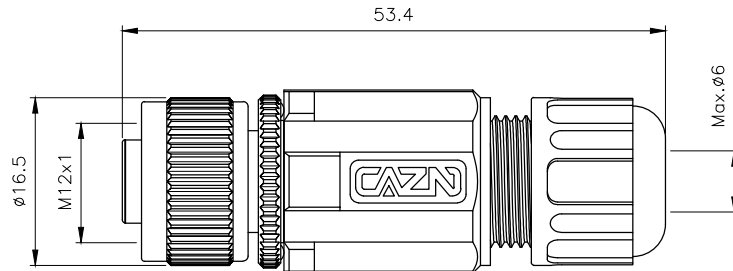

技术参数

连接方式: 螺纹连接

外壳材料: 尼龙, 镀镍

接线方式: 焊线

接触体材料: 磷铜, 镀金

污染等级: 3

绝缘体材料: 增强尼龙, 黑色

温度范围: -40°C ~ +80°C

密封材料: 橡胶, 黑色

防护等级: IP67

插拔周期: ≥500


GENERAL TOLERANCE (UNLESS SPECIFIED)

≤10 ±0.1

<10~≤20 ±0.2

<20~≤50 ±0.5

Angle ±1°



THIRD ANGLE

DWN

DATE

W.M

2022.8.23

CHK

DATE

APVD

DATE

UNIT

MM

REV

A

SIZE

A4

SHEET

1 OF 1

CAZN 正成

TITLE

M12 塑料孔型组装式插头

PART NO

DRAWING NO

M12P-A-Sx